




SR 600 (US 92) Resurfacing from west of Jersey Rd to West of SR 555 (US 17) 447429-1

Project Details	
Work Type	Milling and Resurfacing
Phase	Construction
Limits	West of Jersey Rd to West of US 17
Project Start	Early 2023
Length	2.4 miles
City	Lake Alfred Winter Haven
County	Polk
Road	SR 600 US 17 US 92
Construction Cost	\$7.4 million
Estimated Completion	Late 2024

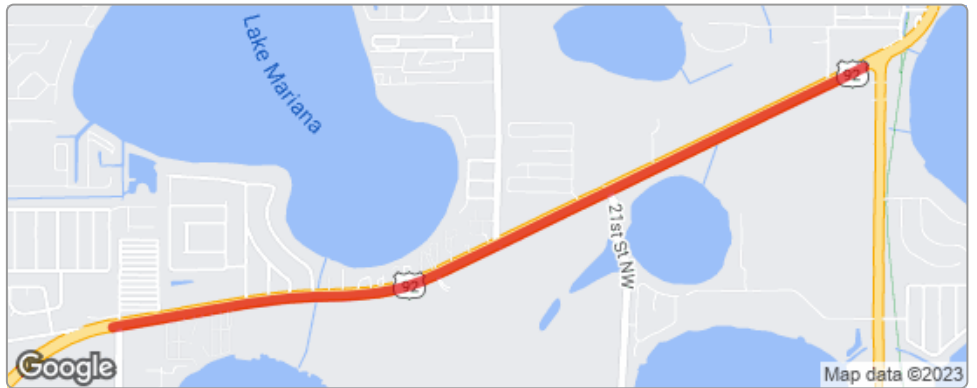

About

The US 92 resurfacing project from west of Jersey Road to west of US 17 is intended to extend the service life of the existing roadway and improve safety. The project includes:

- milling and resurfacing of the existing pavement and outside shoulders along US 92
- closing the median opening 1,000 ft northeast of the intersection of US 92 and Lynchburg Road
- constructing inside paved shoulders along the median in both directions
- widening at the existing right-turn lanes to provide keyhole bicycle lanes
- replacing the existing median curb
- making minor drainage improvements
- updating signal equipment
- improving the intersection with Lynchburg Road to meet Americans with Disabilities Act (ADA) criteria
- reconstructing some driveways
- placing new pavement markings
- updating signage

Contact Information	
Communications Team	
Sandra Mancil 863-519-4116 Sandra.Mancil@dot.state.fl.us	